



CHOOSE YOUR WORKING WIDTH


Front view

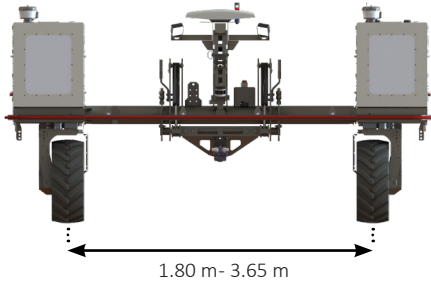

Top view

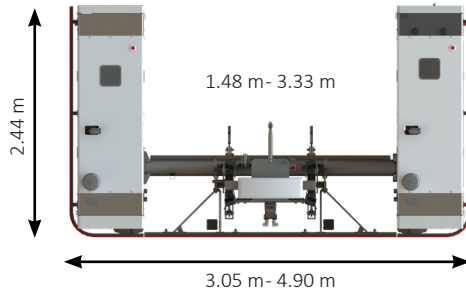

Side view

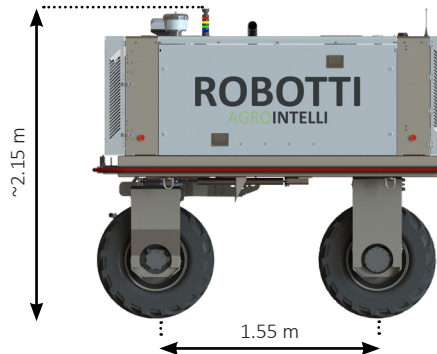

Note: Other measurements available on request



Wide (Default)
BKT Agrimax 320-65 R16
Width: 31.9 cm



Narrow
BKT Agrimax 260-70 R16
Width: 25.8 cm

TECHNICAL SPECIFICATIONS

ROBOTTI Model	150D
ENGINE	
Manufacturer	Kubota, diesel
Number of engines	2
Cylinders per engine	4
Total engine (s) gross power (kW/hp)	106/144 (kW/hp)
Battery voltage	12V
Environmental standard	EPA/CARB Tier4 + EU Stage V
Diesel tank	2 x 100 L
TRANSMISSION SYSTEM	
Forward speed in autonomous mode (km/h)	Up to 5 km/h (3.1 mph)
High speed (manual)	Up to 10 km/h (6.2 mph)
HYDRAULIC SYSTEM	
Hydraulics	Poclair Standard Hydraulics
Hydraulic connectors	1 double acting outlet (max. 40 l/min) + free return
PTO	Heavy duty PTO engine (20 kW 540 RPM or 40 kW 1000 RPM)
SAFETY AND NAVIGATION	
Pressure sensitive bumper and emergency stop buttons	Standard
GNSS-based virtual fencing	Standard
Remote controller/joystick	Standard
LIDAR laser scanner	Standard
RTK-GNSS (GPS)	Standard
Vision computer and camera package (front and rear)	Optional
Light package (front and rear)	Optional
ADDITIONAL SPECIFICATIONS	
Lift capacity of the tree-point hitch	750 kg
Dry weight	3150 kg
Drive system	4-wheel drive
Steering	2-wheel steering / Zero-Turn