



CHOOSE YOUR WORKING WIDTH


Front view

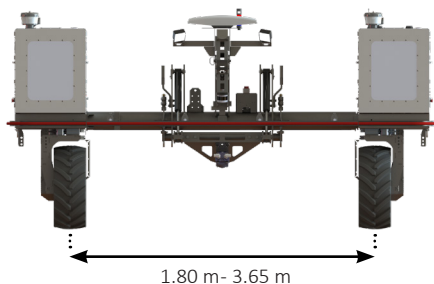

Top view

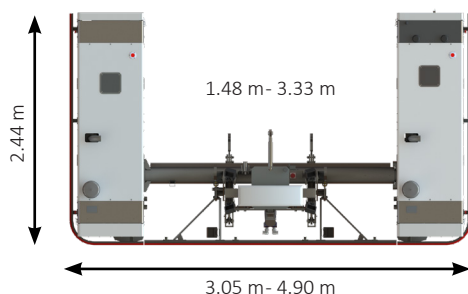

Side view

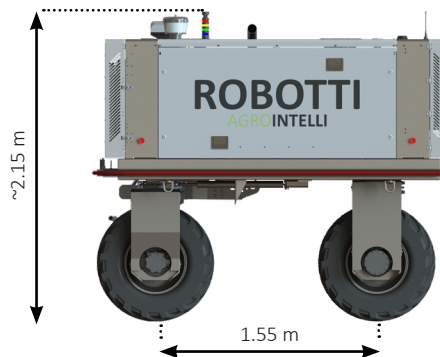

Note: Other measurements available on request



Wide (Default)
BKT Agrimax 320-65 R16
Width: 31.9 cm



Narrow
BKT Agrimax 260-70 R16
Width: 25.8 cm

TECHNICAL SPECIFICATIONS

ROBOTTI Model	LR
ENGINE	
Manufacturer	Kubota, diesel
Number of engines	1
Cylinders per engine	4
Total engine (s) gross power (kW/hp)	54/72 (kW/PS)
Battery voltage	12V
Environmental standard	EPA/CARB Tier4 + EU Stage V
Diesel tank	1 x 300 L
TRANSMISSION SYSTEM	
Forward speed in autonomous mode (km/h)	Up to 5 km/h (3.1 mph)
High speed (manual)	Up to 10 km/h (6.2 mph)
HYDRAULIC SYSTEM	
Hydraulics	Bosch Rexroth Load-Sensing-Hydraulics
Hydraulic connectors	3 double acting outlets (max. 50 l/min) + free return
SAFETY AND NAVIGATION	
Pressure sensitive bumper and emergency stop buttons	Standard
GNSS-based virtual fencing	Standard
Remote controller/joystick	Standard
LIDAR laser scanner	Standard
RTK-GNSS (GPS)	Standard
Vision computer and camera package (front and rear)	Optional
Light package (front and rear)	Optional
ADDITIONAL SPECIFICATIONS	
Lift capacity of the tree-point hitch	1250 kg
Dry weight	2850 kg
Drive system	4-wheel drive
Steering	2-wheel steering / Zero-Turn