



# CHOOSE YOUR WORKING WIDTH


Front view

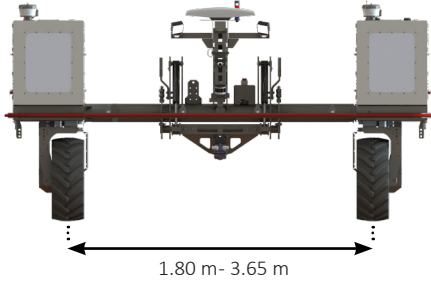

Top view

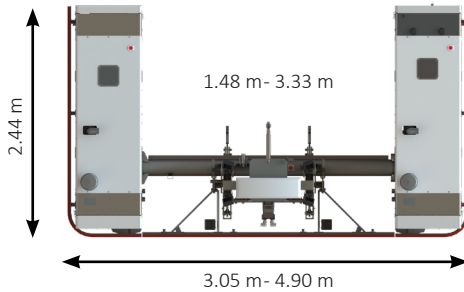

Side view

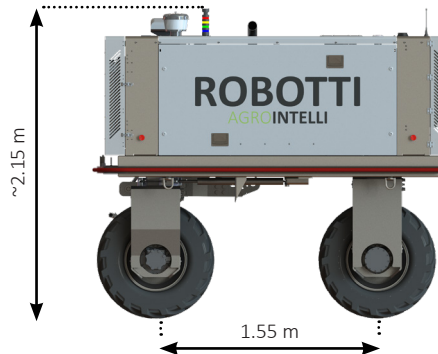

**Note:** Other measurements available on request



**Wide (Default)**  
BKT Agrimax 320-65 R16  
Width: 31.9 cm



**Narrow**  
BKT Agrimax 260-70 R16  
Width: 25.8 cm

## TECHNICAL SPECIFICATIONS

ROBOTTI Model	150D
<b>ENGINE</b>	
Manufacturer	Kubota, diesel
Number of engines	2
Cylinders per engine	4
Total engine(s) gross power	106/144 (kW/hp)
Battery voltage	12V
Environmental standard	EPA/CARB Tier4 + EU Stage V
Diesel tank	2 x 100 L
<b>TRANSMISSION SYSTEM</b>	
Forward speed in autonomous mode	Up to 5 km/h (3.1 mph)
Forward speed in manual mode	Up to 10 km/h (6.2 mph)
<b>HYDRAULIC SYSTEM</b>	
Hydraulics	Poclair Standard
Hydraulic connectors	1 double acting outlet (max. 40 l/min) + free return
PTO	Heavy duty PTO engine (20 kW 540 RPM or 40 kW 1000 RPM)
<b>SAFETY AND NAVIGATION</b>	
Pressure sensitive bumper and emergency stop buttons	Standard
GNSS-based virtual fencing	Standard
Remote controller/joystick	Standard
LIDAR laser scanner	Standard
RTK-GNSS (GPS)	Standard
Vision computer and camera package (front and rear)	Optional
Light package (front and rear)	Optional
<b>ADDITIONAL SPECIFICATIONS</b>	
Lift capacity of the tree-point hitch	750 kg
Dry weight	3150 kg
Drive system	4-wheel drive
Steering	2-wheel steering / Zero-Turn